

Zener Voltage Regulators

200 mW SOD-323 Surface Mount

We declare that the material of product compliance with RoHS requirements.

ORDERING INFORMATION¹⁾

Device*	Package	Shipping
MEZ08-XXX-D1-G Series	SOD-323	3000/Tape&Reel

This series of Zener diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 200 mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

Specification Features:

- Standard Zener Breakdown Voltage Range – 2.4 V to 75 V
- Steady State Power Rating of 200 mW
- Small Body Outline Dimensions: 0.067" x 0.049" (1.7 mm x 1.25 mm)
Low Body Height: 0.035" (0.9 mm)
- Package Weight: 4.507 mg/unit
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- Pb-Free package is available.

Mechanical Characteristics:

CASE: Void-free, transfer-molded plastic

FINISH: All external surfaces are corrosion resistant

MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

POLARITY: Cathode indicated by polarity band



FLAMMABILITY RATING: UL94 V-0

MOUNTING POSITION: Any

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Total Device Dissipation FR-5 Board, (Note 1.) @ TA = 25°C	P _b	200	mW
Derate above 25°C		1.5	mW/°C
Thermal Resistance from Junction to Ambient			
Junction and Storage Temperature Range	T _J , T _{stg}	-65 to+150	°C


1. FR-4 Minimum Pad

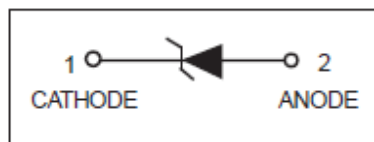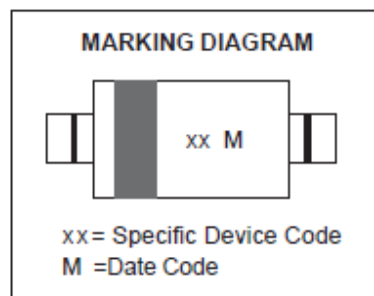

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted,
 $V_F = 0.9\text{ V Max. @ } I_F = 10\text{ mA}$ for all types)

Symbol	Parameter
V_Z	Reverse Zener Voltage @ I_{ZT}
I_{ZT}	Reverse Current
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
I_{ZK}	Reverse Current
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F
αV_Z	Maximum Temperature Coefficient of V_Z
C	Max. Capacitance @ $V_R = 0$ and $f = 1\text{ MHz}$

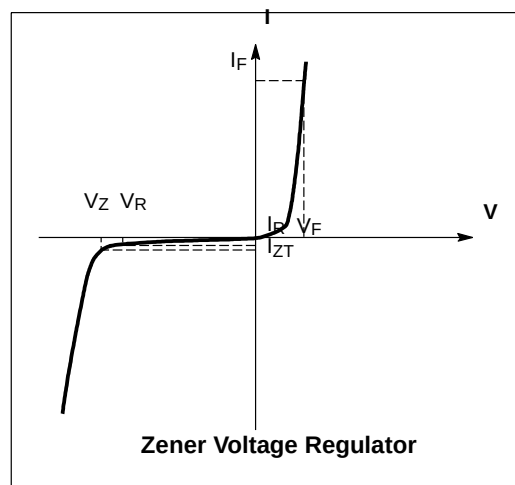

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted, V_F = 0.9 V Max. @ I_F = 10 mA for all types)

Device	Device Marking	Zener Voltage (Note 2.)				Zener Impedance			Leakage Current		V _Z (mV/k) @ I _{ZT}		C @ V _R = 0 f = 1 MHz
		V _Z (Volts)			@ I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}		I _R @ V _R				
		Min	Nom	Max	mA	Q	Q	mA	μA	Volts	Min	Max	pF
MEZ08-2.4A-D1-G	00	2.2	2.4	2.6	5	100	1000	0.5	50	1.0	-3.5	0	450
MEZ08-2.7A-D1-G	01	2.5	2.7	2.9	5	100	1000	0.5	20	1.0	-3.5	0	450
MEZ08-3.0A-D1-G	02	2.8	3.0	3.2	5	100	1000	0.5	10	1.0	-3.5	0	450
MEZ08-3.3A-D1-G	05	3.1	3.3	3.5	5	95	1000	0.5	5	1.0	-3.5	0	450
MEZ08-3.6A-D1-G	06	3.4	3.6	3.8	5	90	1000	0.5	5	1.0	-3.5	0	450
MEZ08-3.9A-D1-G	07	3.7	3.9	4.1	5	90	1000	0.5	3	1.0	-3.5	-2.5	450
MEZ08-4.3A-D1-G	08	4.0	4.3	4.6	5	90	1000	0.5	3	1.0	-3.5	0	450
MEZ08-4.7A-D1-G	09	4.4	4.7	5.0	5	80	800	0.5	3	2.0	-3.5	0.2	260
MEZ08-5.1A-D1-G	0A	4.8	5.1	5.4	5	60	800	0.5	2	2.0	-2.7	1.2	225
MEZ08-5.6A-D1-G	0C	5.2	5.6	6.0	5	40	700	0.5	1	2.0	-2.0	2.5	200
MEZ08-6.2A-D1-G	0E	5.8	6.2	6.6	5	10	100	0.5	3	4.0	0.4	3.7	185
MEZ08-6.8A-D1-G	0F	6.4	6.8	7.2	5	15	160	0.5	2	4.0	1.2	4.5	155
MEZ08-7.5A-D1-G	0G	7.0	7.5	7.9	5	15	160	0.5	1	5.0	2.5	5.3	140
MEZ08-8.2A-D1-G	0H	7.7	8.2	8.7	5	15	160	0.5	0.7	5.0	3.2	6.2	135
MEZ08-9.1A-D1-G	0K	8.5	9.1	9.6	5	15	160	0.5	0.2	7.0	3.8	7.0	130
MEZ08-10A-D1-G	0L	9.4	10	10.6	5	20	160	0.5	0.1	8.0	4.5	8.0	130
MEZ08-11A-D1-G	0M	10.4	11	11.6	5	20	160	0.5	0.1	8.0	5.4	9.0	130
MEZ08-12A-D1-G	0N	11.4	12	12.7	5	25	80	0.5	0.1	8.0	6.0	10	130
MEZ08-13A-D1-G	0P	12.4	13.25	14.1	5	30	80	0.5	0.1	8.0	7.0	11	120
MEZ08-15A-D1-G	0T	14.3	15	15.8	5	30	400	0.5	0.05	10.5	9.2	13	110
MEZ08-16A-D1-G	0U	15.3	16.2	17.1	5	40	400	0.5	0.05	11.2	10.4	14	105
MEZ08-18A-D1-G	0W	16.8	18	19.1	5	45	400	0.5	0.05	12.6	12.4	16	100
MEZ08-20A-D1-G	0Z	18.8	20	21.2	5	55	500	0.5	0.05	14.0	14.4	18	85
MEZ08-22A-D1-G	10	20.8	22	23.3	5	55	500	0.5	0.05	15.4	16.4	20	85
MEZ08-24A-D1-G	11	22.8	24.2	25.6	5	70	120	0.5	0.05	16.8	18.4	22	80
MEZ08-27A-D1-G	12	25.1	27	28.9	2	80	300	0.5	0.05	18.9	21.4	25.3	70
MEZ08-30A-D1-G	14	28	30	32	2	80	300	0.5	0.05	21.0	24.4	29.4	70
MEZ08-33A-D1-G	18	31	33	35	2	80	300	0.5	0.05	23.2	27.4	33.4	70
MEZ08-36A-D1-G	19	34	36	38	2	90	500	0.5	0.05	25.2	30.4	37.4	70
MEZ08-39A-D1-G	20	37	39	41	2	130	500	0.5	0.05	27.3	33.4	41.2	45
MEZ08-43A-D1-G	21	40	43	46	2	150	500	0.5	0.05	30.1	37.6	46.6	40
MEZ08-47A-D1-G	1A	44	47	50	2	170	500	0.5	0.05	32.9	42.0	51.8	40
MEZ08-51A-D1-G	1C	48	51	54	2	180	500	0.5	0.05	35.7	46.6	57.2	40
MEZ08-56A-D1-G	1D	52	56	60	2	200	500	0.5	0.05	39.2	52.2	63.8	40
MEZ08-62A-D1-G	1E	58	62	66	2	215	500	0.5	0.05	43.4	58.8	71.6	35
MEZ08-68A-D1-G	1F	64	68	72	2	240	500	0.5	0.05	47.6	65.6	79.8	35
MEZ08-75A-D1-G	1G	70	75	79	2	255	500	0.5	0.05	52.5	73.4	88.6	35

2. Zener voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C.



Typical Characteristics

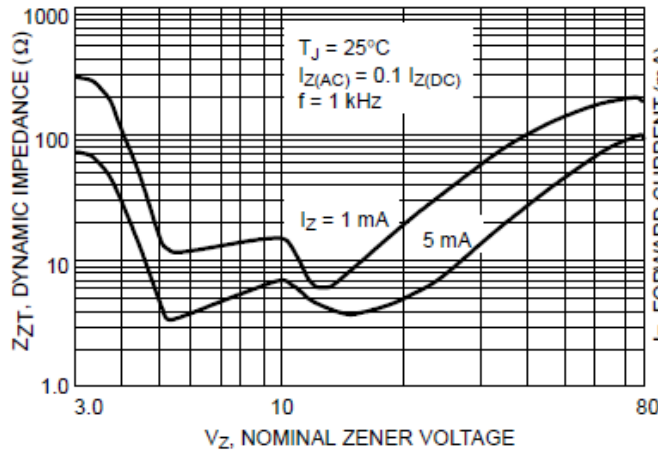


Figure 1. Effect of Zener Voltage on Zener Impedance

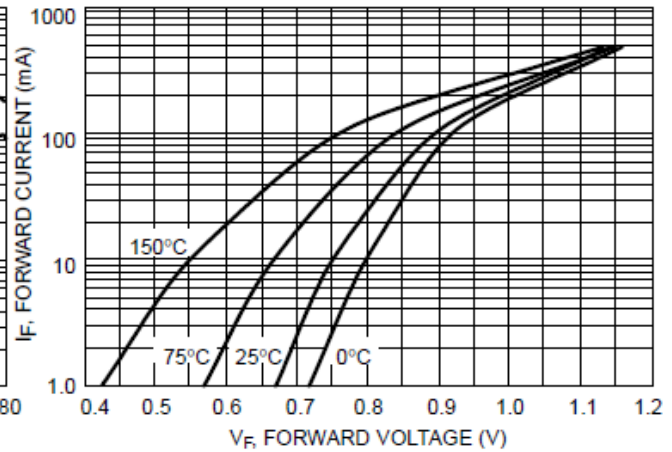


Figure 2. Typical Forward Voltage

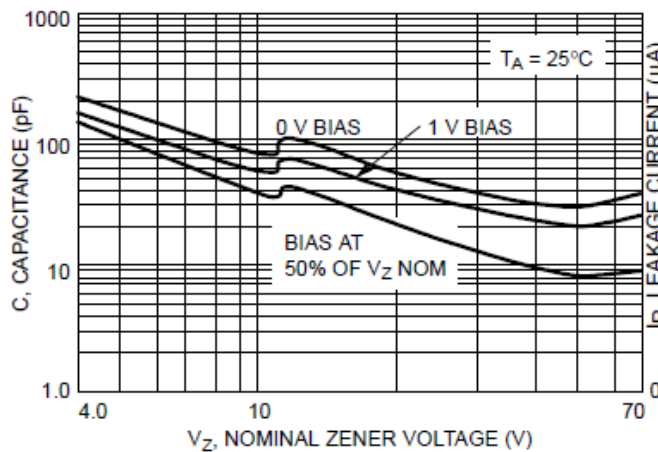


Figure 3. Typical Capacitance

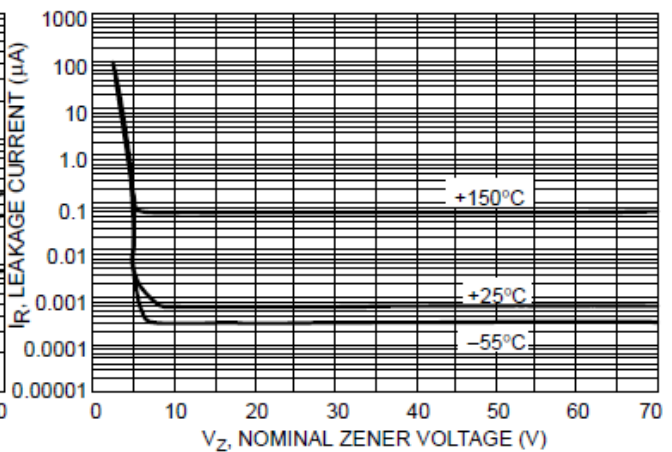


Figure 4. Typical Leakage Current

DCC
正式發行

Typical Characteristics

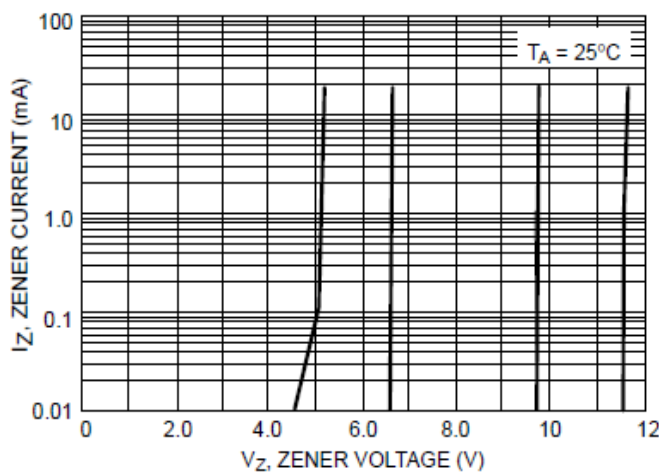


Figure 5. Zener Voltage versus Zener Current
(V_Z Up to 12 V)

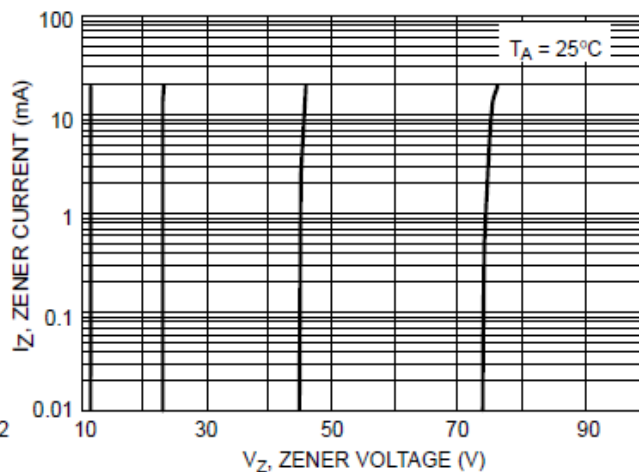


Figure 6. Zener Voltage versus Zener Current
(12 V to 75 V)


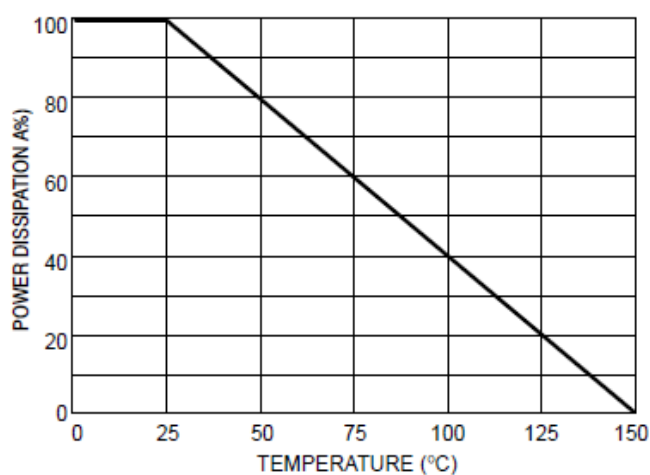


Figure 7. Steady State Power Derating

DCC
正式發行

PACKAGE DIMENSIONS

SOD-323

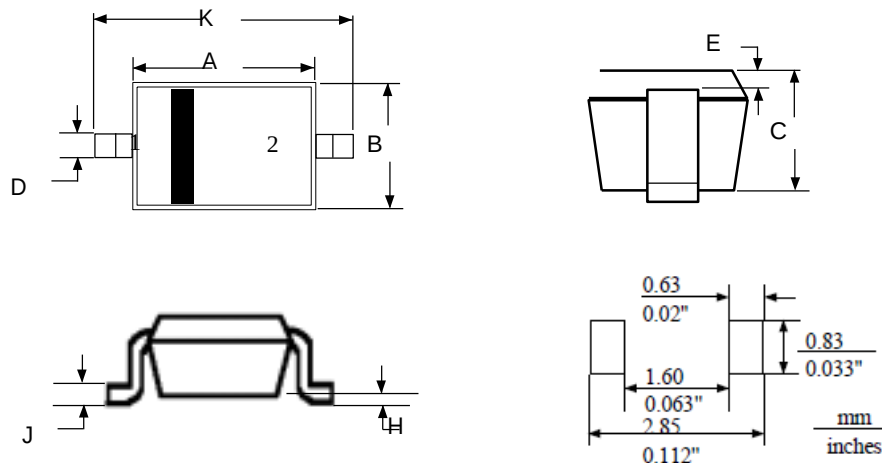

NOTES:

1. CONTROLLING DIMENSION: MILLIMETERS
2. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.

DIN	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.80	0.063	0.071
B	1.15	1.35	0.045	0.053
C	0.80	1.00	0.031	0.039
D	0.25	0.40	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.00	0.10	0.0000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.30	2.70	0.091	0.106

STYLE 1:

- PIN 1: CATHODE
2: ANODE

